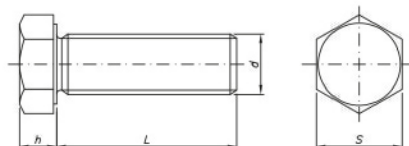


Fixadores

PARAFUSO CABEÇA SEXTAVADA ROSCA INTEIRA
MATERIAL:
AÇO INOXIDÁVEL - 316
ACABAMENTO:
PASSIVADO
DIMENSÕES:
ASME B18.2.1
ROSCA:
UNC - ASME B1.1 • BSW - DIN 11

TABELA DE DIMENSÕES (MM)

d (diâmetro)	3/16	1/4	5/16	3/8	1/2	1/2	5/8	3/4	7/8	1"	1-1/8	1-1/4	1-1/2
rosca/FPP	BSW-24	UNC-20	UNC-18	UNC-16	UNC-13	BSW-12	UNC-11	UNC-10	UNC-9	UNC-8	UNC-7	UNC-7	UNC-6
s (chave) pol.	5/16	7/16	1/2	9/16	3/4	3/4	15/16	1-1/8	1-5/16	1-1/2	1-11/16	1-7/8	2-1/4
máx. mm	7,90	11,11	12,70	14,27	19,05	19,05	23,81	28,57	33,33	38,10	42,86	47,62	57,15
h (altura cabeça) máx.	3,17	4,14	5,33	6,17	8,20	8,20	10,23	12,26	14,30	15,92	18,23	20,65	24,73

QUANTIDADES POR EMBALAGEM

Diâmetro ► Comprimento ▼	3/16 BSW-24	1/4 UNC-20	5/16 UNC-18	3/8 UNC-16	1/2 UNC-13	1/2 BSW-12	5/8 UNC-11	3/4 UNC-10	7/8 UNC-9	1" UNC-8	1-1/8 UNC-7	1-1/4 UNC-7	1-1/2 UNC-6
1/2	500	500	500	200									
5/8	500	500	500	200									
3/4	500	500	200	200									
7/8	500	500	200	200									
1	500	500	200	200	100	100	100	50					
1-1/4	500	200	200	200	100	100	100	50					
1-1/2	500	200	200	200	100	100	50	50	50				
1-3/4	200	200	200	200	100	100	50	50	50				
2	200	200	200	200	100	100	50	50	20	20			
2-1/2	200	200	100	100	50	50	50	50	20	20	10	10	
3	200	100	100	100	50	50	20	20	20	10	10	10	5
3-1/2			100	100	50	50	20	20	20	10	10	10	5
4			100	100	50	50	20	20	20	10	10	10	5
4-1/2							20	20	20	10	10	10	5
5							20	20	20	10	10	10	5
5-1/2							20	20	20	10	10	5	5
6							20	20	20	10	10	5	5

NAPOLIS FIXADORES, CONSTRUINDO RELAÇÕES DESDE 1969.
(11) 2117-8600


napoles@parafusosnapoles.com.br
www.parafusosnapoles.com.br