



PORCA SEXTAVADA TORQUE

MATERIAL:
AÇO CARBONO
ACABAMENTO:
ZINCADO BRANCO
DIMENSÕES:
IFI - 100/107 • CONFORME PADRÃO NAPOLES
ROSCA:
UNC - ASME B1.1

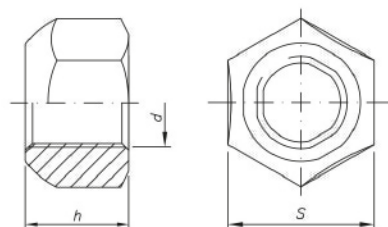


TABELA DE DIMENSÕES (MM) • QUANTIDADES POR EMBALAGEM

d (diâmetro)	rosca/FPP	s (chave) máx.		h (altura)		QTDD
		pol.	mm	Mínimo	Máximo	
1/4	UNC-20	7/16	11,11	5,38	6,20	1.000
5/16	UNC-18	1/2	12,70	6,55	7,75	1.000
3/8	UNC-16	9/16	14,27	8,13	9,35	500
7/16	UNC-14	5/8	15,87	9,27	10,85	500
1/2	UNC-13	3/4	19,05	10,84	12,50	500
9/16	UNC-12	7/8	22,22	12,01	14,00	200
5/8	UNC-11	15/16	23,81	13,59	15,60	200
3/4	UNC-10	1-1/8	28,57	15,67	18,20	100
7/8	UNC-9	1-5/16	33,33	18,39	20,80	50
1	UNC-8	1-1/2	38,10	21,11	23,00	50



PORCA SEXTAVADA TORQUE - UNF

MATERIAL:
AÇO CARBONO
ACABAMENTO:
ZINCADO BRANCO
DIMENSÕES:
IFI - 100/107 • CONFORME PADRÃO NAPOLES
ROSCA:
UNF - ASME B1.1

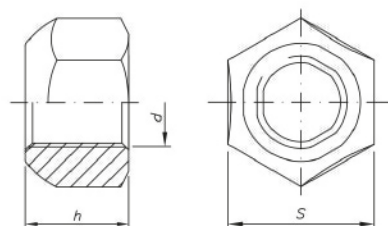


TABELA DE DIMENSÕES (MM) • QUANTIDADES POR EMBALAGEM

d (diâmetro)	rosca/FPP	s (chave) máx.		h (altura)		QTDD
		pol.	mm	Mínimo	Máximo	
1/4	UNF-28	7/16	11,11	5,38	6,20	1.000
5/16	UNF-24	1/2	12,70	6,55	7,75	1.000
3/8	UNF-24	9/16	14,27	8,13	9,35	500
7/16	UNF-20	5/8	15,87	9,27	10,85	500
1/2	UNF-20	3/4	19,05	10,84	12,50	500
9/16	UNF-18	7/8	22,22	12,01	14,00	200
5/8	UNF-18	15/16	23,81	13,59	15,60	200
3/4	UNF-16	1-1/8	28,57	15,67	18,20	100
7/8	UNF-14	1-5/16	33,33	18,39	20,80	50
1	UNF-12	1-1/2	38,10	21,11	23,00	50