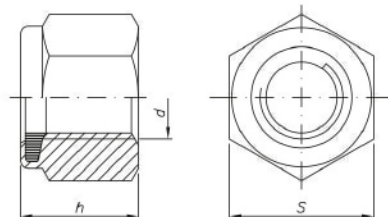



PORCA TRAVANTE ALTA COM NYLON

MATERIAL:
AÇO CARBONO - GRAU 2 (NE2)
ACABAMENTO:
ZINCADO BRANCO
DIMENSÕES:
IFI 100 (ASME B18.16.6)
ROSCA:
UNC / UNF / UNS - ASME B1.1 • BSW - DIN 11


TABELA DE DIMENSÕES (MM) • QUANTIDADES POR EMBALAGEM
PORCA TRAVANTE ALTA C/ NYLON • UNC - GRAU 2

| d (diâmetro) | rosca/FPP | h (Altura) máx. | s (Chave) máx. | | QTDD |
|-----------------|-----------|-----------------------|----------------|-------|-------|
| | | | pol. | mm | |
| #4 | UNC-40 | 3,88 | 1/4 | 6,35 | 5.000 |
| #5 | UNC-40 | 3,88 | 1/4 | 6,35 | 2.000 |
| #6 | UNC-32 | 4,77 | 5/16 | 7,93 | 2.000 |
| #8 | UNC-32 | 6,07 | 11/32 | 8,73 | 2.000 |
| #10 | UNC-24 | 6,32 | 3/8 | 9,52 | 2.000 |
| 1/4 | UNC-20 | 8,33 | 7/16 | 11,11 | 1.000 |
| 5/16 | UNC-18 | 9,11 | 1/2 | 12,70 | 500 |
| 3/8 | UNC-16 | 11,88 | 9/16 | 14,27 | 500 |
| 7/16 | UNC-14 | 11,88 | 5/8 | 15,87 | 500 |
| 1/2 | UNC-13 | 15,46 | 3/4 | 19,05 | 200 |
| 1/2 | BSW-12 | 15,46 | 3/4 | 19,05 | 200 |
| 9/16 | UNC-12 | 16,66 | 7/8 | 22,22 | 200 |
| 5/8 | UNC-11 | 19,43 | 15/16 | 23,81 | 100 |
| 3/4 | UNC-10 | 22,60 | 1-1/16 | 26,98 | 100 |
| 7/8 | UNC-9 | 25,37 | 1-1/4 | 31,75 | 50 |
| 1 | UNC-8 | 27,38 | 1-7/16 | 36,51 | 50 |
| 1-1/8 | UNC-7 | 30,55 | 1-5/8 | 41,27 | 20 |
| 1-1/4 | UNC-7 | 36,11 | 1-13/16 | 46,03 | 20 |
| 1-1/2 | UNC-6 | 41,65 | 2-3/16 | 55,56 | 20 |

PORCA TRAVANTE ALTA C/ NYLON • UNF - GRAU 2

| d (diâmetro) | rosca/FPP | h (Altura) máx. | s (Chave) máx. | | QTDD |
|-----------------|-----------|-----------------------|----------------|-------|-------|
| | | | pol. | mm | |
| #10 | UNF-32 | 6,32 | 3/8 | 9,52 | 2.000 |
| 1/4 | UNF-28 | 8,33 | 7/16 | 11,11 | 1.000 |
| 5/16 | UNF-24 | 9,11 | 1/2 | 12,7 | 500 |
| 3/8 | UNF-24 | 11,88 | 9/16 | 14,27 | 500 |
| 7/16 | UNF-20 | 11,88 | 5/8 | 15,87 | 500 |
| 1/2 | UNF-20 | 15,46 | 3/4 | 19,05 | 200 |
| 9/16 | UNF-18 | 16,66 | 7/8 | 22,22 | 200 |
| 5/8 | UNF-18 | 19,43 | 15/16 | 23,81 | 100 |
| 3/4 | UNF-16 | 22,60 | 1-1/16 | 26,98 | 100 |
| 7/8 | UNF-14 | 25,37 | 1-1/4 | 31,75 | 50 |
| 1 | UNS-14 | 27,38 | 1-7/16 | 36,51 | 50 |
| 1 | UNF-12 | 27,38 | 1-7/16 | 36,51 | 50 |

APLICAÇÃO:

PARA MONTAGENS DE JUNTAS FIXADAS SUJEITAS A VIBRAÇÕES, OSCILAÇÕES, ENVELHECIMENTO NATURAL, ETC.

NAPOLÉS FIXADORES, CONSTRUINDO RELAÇÕES DESDE 1969.
(11) 2117-8600

 napoles@parafusosnapoles.com.br
 www.parafusosnapoles.com.br